

HOISTING A CAR AND PLACING IT ON JACK STANDS.

It is quite appalling the damage done to the under body of cars by idiots with uncontrolled jacks. The following diagrams should be studied by owners and notice taken of the activities of vandals when they get near the cars.


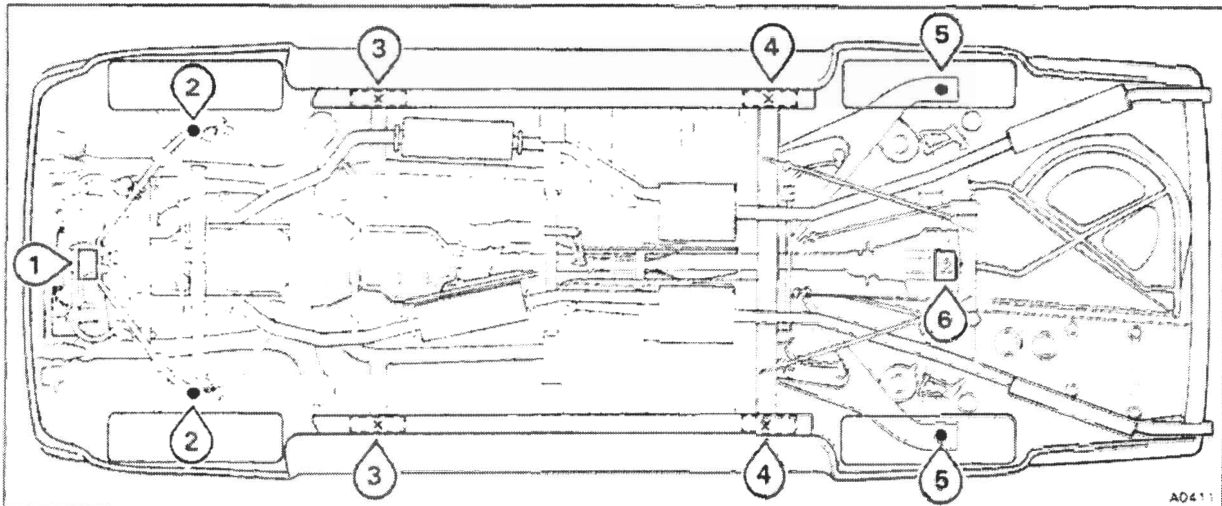


Fig. A7-1 Car jacking positions and support locations

- | | |
|---|--|
| 1 Trolley jack positions (front) | 4 Car jack and sill block positions (rear) |
| 2 Car stands (front) | 5 Car stands (rear) |
| 3 Car jack and sill block positions (front) | 6 Trolley jack positions (rear) |

Hopefully you have a trolley jack. Get your local rubber man to cut a 6" square of 1" rubber for you to sit on the head of the jack. This allows the jack to get a better grip on the bits underneath and also prevents damage by scratching etc. And if you have to tie the car down here are the things to lash to!

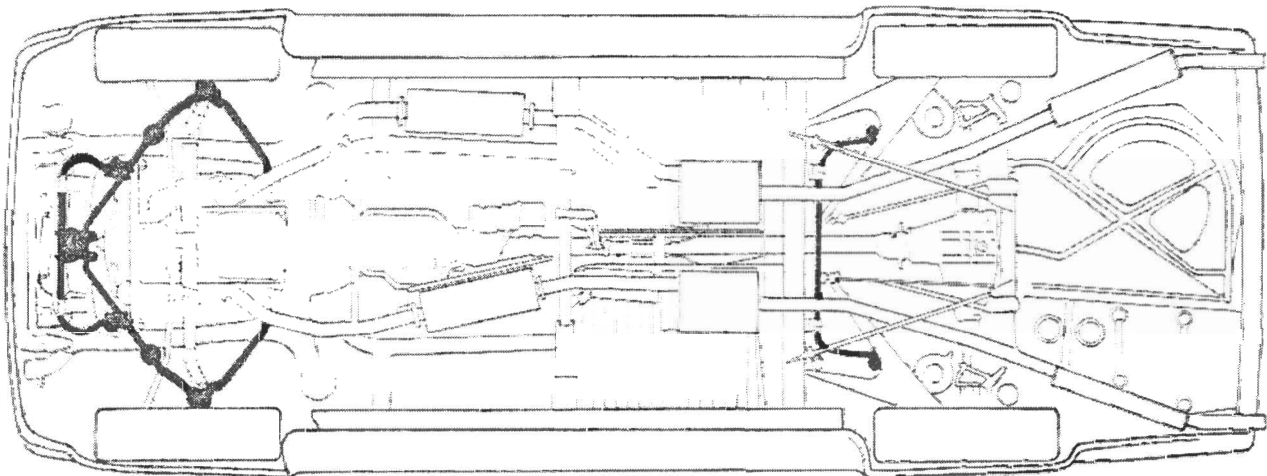

A0408